



## The EXPLODET project: advanced nuclear techniques for humanitarian demining

G. Viesti<sup>a</sup>, M. Cinausero<sup>b</sup>, N. Cufaro-Petroni<sup>c</sup>, G. D'Erasmus<sup>c</sup>, D. Fabris<sup>a</sup>, E. Fioretto<sup>b</sup>,  
R. Fonte<sup>d</sup>, M. Lunardon<sup>a</sup>, I. Lazzizzera<sup>e</sup>, G. Nardelli<sup>f</sup>, G. Nardulli<sup>c</sup>, G. Nebbia<sup>a</sup>,  
M. Palomba<sup>c</sup>, A. Pantaleo<sup>c</sup>, L. Pappalardo<sup>d</sup>, S. Pesente<sup>a</sup>, P. Prati<sup>g</sup>, G. Prete<sup>b,\*</sup>, S. Reito<sup>d</sup>,  
A. Sartori<sup>c</sup>, G. Tecchiolli<sup>c</sup>, S. Zavatarelli<sup>g</sup>, V. Filippini<sup>h</sup>

<sup>a</sup>*I.N.F.N. and Dipartimento di Fisica di Padova, I-35131 Padua, Italy*

<sup>b</sup>*I.N.F.N., Laboratori Nazionali di Legnaro, I-35020 Legnaro, Italy*

<sup>c</sup>*I.N.F.N. and Dipartimento di Fisica di Bari, Bari, Italy*

<sup>d</sup>*I.N.F.N. and Dipartimento di Fisica di Catania, Catania, Italy*

<sup>e</sup>*I.N.F.N. and Dipartimento di Fisica di Trento, Trento, Italy*

<sup>f</sup>*I.N.F.N. Sezione di Padova and Universita' di Venezia, Venice, Italy*

<sup>g</sup>*I.N.F.N. and Dipartimento di Fisica di Genova, Genova, Italy*

<sup>h</sup>*I.N.F.N. Sezione di Pavia, Pavia, Italy*

---

### Abstract

Thermal neutron activation and fast neutron scattering are known to be a useful tool to detect hidden explosives which present an elevated concentration of nitrogen and peculiar elemental ratio for light elements (C, N, O). Such characteristics can be suitably optimized to detect the small amount of explosives contained in anti-personnel mines (APM) disseminated in former war theatres. We report here on a research program aimed at defining a conceptual design of a field operated system for APM detection based on neutron induced reactions. © 1999 Elsevier Science B.V. All rights reserved.

*Keywords:* Nuclear sensors; Scintillator; EXPLODET project; Anti-personnel mines

---

### 1. Introduction

The global problem of many countries infested with landmines demands new technical solutions in

the localization and identification of hidden explosives, especially of anti-personnel landmines (APM). It is believed that only a combination of different sensor systems can fulfill the requirements of humanitarian demining activities [1].

In this respect, nuclear techniques employing neutrons have proved to be a useful tool in the identification of commonly used explosives [2]

---

\*Corresponding author. Fax: +39 49 641925; e-mail: gian@lnl.infn.it.

which present an elevated concentration of nitrogen. Characteristic  $\gamma$ -rays emitted in the thermal neutron capture reaction or in the fast neutron inelastic excitation of nitrogen nuclei have been proposed as the signature to identify hidden explosives [3]. Compared to the other proposed non-nuclear techniques, the nuclear sensor is the only one allowing to discriminate mines from other underground objects.

The present challenge is to conceive a cost-effective, mobile detection system based on nuclear techniques which can be operated, in connection with other non-nuclear sensors, by non-specifically trained personnel in field conditions.

To this end one has to consider a number of specific requirements set by the United Nations to tailor the objectives of all R&D initiatives, such requirements can be summarized as follows. The probability to localize anti-personnel mines without metal parts must be 99.9%. It must be possible to locate small anti-personnel mines down to a size of 4 cm, buried in soil or grass at a depth of 10–20 cm. All mine localization equipment, apart from being used on-site, must also be serviced on-site. The use of the systems must be simple and the provided information clear. The actual cost of demining operations with the present techniques is about US\$ 0.3–0.5/m<sup>2</sup>. As a result of R&D initiatives United Nations asked for a 10-fold reduction of these costs with a target of a 50-fold reduction by the year 2000.

The research program EXPLODET (EXPLOsive DETection) of the Istituto Nazionale di Fisica Nucleare is aimed at defining a conceptual design of such a system. The EXPLODET program (1998–2000) will take advantage of modern technologies originating directly from basic nuclear research, including advanced detectors, high-performance low-cost electronics and automatic recognition algorithms.

An indoor test site equipped with <sup>252</sup>Cf source ( $\sim 10^6$  neutron/s) is operational at the Physics Department of the Bari University. A second site at the Laboratori Nazionali di Legnaro will host a  $\sim 10^7$  neutron/s <sup>252</sup>Cf source. Finally, a third test site located at the LENA facility of the Pavia University will host a portable electronic neutron source. All these sites will be equipped with test

benches made of soil, gravel, sand and other materials in order to reproduce at best the field operating conditions.

Preliminary R&D activities have already started at the Laboratori Nazionali di Legnaro using existing sources ( $\sim 10^4$ – $10^5$  neutron/s) and the 7 MV VdG accelerator. Results are reported in the following.

## 2. Test at the VdG accelerator

The  $\gamma$ -ray at  $E_\gamma = 10.8$  MeV emitted in thermal neutron capture reactions on nitrogen nuclei has been proposed to identify hidden explosives [1]. The cross section of the capture reaction is  $\sigma_{(n,\gamma)} = 75$  mb at thermal neutron energy and the probability of the emission is 14% per capture event. The energy of this  $\gamma$ -ray is relatively high with respect to the majority of the  $\gamma$ -ray emitted from the irradiation of common materials with thermal neutrons, making possible the identification of such events using low-resolution scintillator detectors.

In-beam tests have been performed using the CN VdG accelerator at LNL as a neutron source. The source reaction <sup>9</sup>Be(d, n) on a thick target was used, employing 1 MeV d beam of  $I = 0.5$   $\mu$ A intensity. In those conditions  $\sim 2.5 \times 10^7$  neutron/s are produced with an average energy of 1.5 MeV. Primary neutrons are then thermalized in a moderator consisting of an inner shell of lead followed by high-density polyethylene and by an outer shell of cadmium. The samples were placed at  $\theta_{lab} = 0^\circ$  with respect to the beam direction at a distance of  $\sim 20$  cm.

The detectors were positioned also at  $\sim 20$  cm from the sample position at  $\theta_{lab} = 90^\circ$  with respect to the beam direction and shielded with polyethylene and lead. The  $\gamma$ -rays produced in the irradiation of different samples have been first detected by using HPGe detectors in order to optimize the signal to noise ratio. Then NaI(Tl) (10 cm  $\times$  10 cm) scintillators were used.

In Fig. 1 we report the spectra relative to the irradiation of a 800 g melamine (C<sub>3</sub>H<sub>6</sub>N<sub>6</sub>) sample simulating the explosive and to a soil sample with the same geometry. In the energy range 9–11 MeV the spectrum shows structures only in the case of

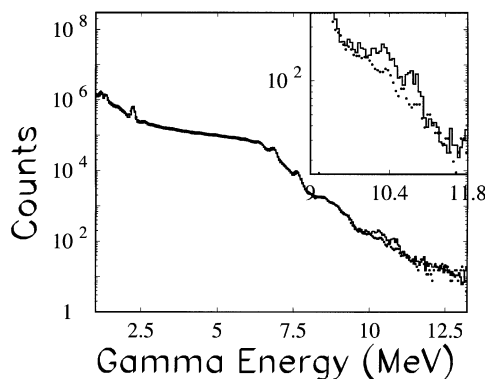


Fig. 1.  $\gamma$ -ray spectra from the irradiation of a melamine (line) and a soil (dots) samples with neutrons.

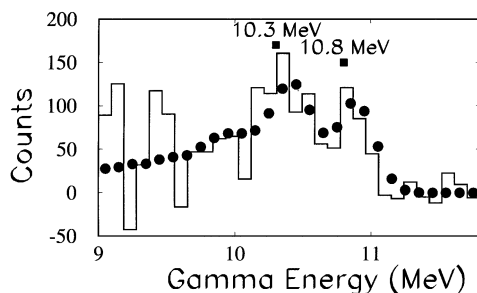


Fig. 2. Difference (melamine-soil)  $\gamma$ -ray spectrum. The prediction from a GEANT simulation is also shown (dots).

the melamine irradiation. In Fig. 2 we show the spectrum obtained by subtracting from the Melamine spectrum the corresponding one relative to the soil sample. This difference spectrum shows very clearly peaks at 10.8 MeV (full energy) and 10.3 MeV (first escape) due to the neutron capture events in nitrogen. The lineshape of the structure is very well accounted for by calculation of the response function of our detector performed with the computer code GEANT [4].

The results reported in Figs. 1 and 2 have been used to get a first insight on the measure time in field conditions, in the case of a nuclear sensor employing a  $^{252}\text{Cf}$  source emitting  $\sim 10^7$  neutron/s and four  $\gamma$ -ray detectors having efficiency comparable to that of the NaI(Tl) scintillator used here. The actual estimate is that we should be able to repro-

duce the results in Fig. 2 in less than 1 min irradiation which opens the possibility of detecting small quantities of explosive in a reasonable time.

### 3. Scintillation detector tests

In the design of a landmine nuclear sensor, a detailed understanding of the sources of background in the  $\gamma$ -ray energy region  $E_\gamma = 9\text{--}12$  MeV is needed. An important contribution to the background will derive from capture reactions in the moderator, in the structural material and in the detector itself. Furthermore, when a  $^{252}\text{Cf}$  source is used, the direct emission of prompt energetic  $\gamma$ -rays and neutrons in the fission process might contribute also to the  $\gamma$ -ray spectrum in the region of interest.

Measurements have been performed to determine the different sources of background at  $E_\gamma = 9\text{--}12$  MeV by using a low activity  $^{252}\text{Cf}$  source ( $\sim 10^4$  fission/s). The fission source was placed at the center of a barrel made by six  $\text{BaF}_2$  scintillation detectors having hexagonal shape  $48\text{ cm}^2$  surface, 12 cm thick. Standard scintillation detectors, already available in the laboratory, have been placed at  $\sim 80$  cm from the fission source. The time difference between the detectors and the (delayed)  $\text{BaF}_2$  signals was used to discriminate prompt  $\gamma$ -rays from fast neutrons and other delayed events. Furthermore, inclusive energy spectra were measured using the  $^{252}\text{Cf}$  source with and without the lead-plastic-cadmium moderator.

We have studied  $10\text{ cm} \times 10\text{ cm}$  NaI(Tl) and BGO detectors and a hexagonal  $\text{BaF}_2$  scintillator ( $48\text{ cm}^2$  surface, 12 cm thick). The obtained results can be summarized as follows:

1. The emission of prompt energetic  $\gamma$ -rays from the fission source is characterized by a well-known exponential shape. The probability of having events in the  $E_\gamma = 9\text{--}12$  MeV region is of the order of  $10^{-5}\text{--}10^{-6}$  of the total yield, in agreement with results from [5].
2. Fast neutrons are detected in the scintillators mainly via  $(n, n'\gamma)$  reactions [6]. The cross section for  $(n, p)$  and  $(n, \alpha)$  reactions on light nuclei (Na, F, O) seems to be non-negligible. Nevertheless,

the amplitude of the signal due to the scintillation light produced in such reactions is far lower than the region of interest. We found that the pulse-height spectrum due to fast neutrons shows an endpoint close to 8–10 MeV, due to the tail of high-energy neutrons emitted in the fission process.

Considering the “inclusive” measurements, it is found that the event rate in the NaI(Tl) and BaF<sub>2</sub> in the energy range  $E_\gamma = 9\text{--}12$  is scarcely affected by the moderated <sup>252</sup>Cf source being of the order of 0.1–0.2 event/s, practically equivalent to the rate due only to cosmic-rays and natural radioactivity. On the contrary, the BGO scintillator shows a very large increase (1.7 event/s with respect to 0.1 event/s) when irradiated with the moderated fission source. This is due to the capture reaction in Ge isotopes which is known to produce  $\gamma$ -rays with energy  $E_\gamma = 10.2$  MeV [7]. Results rule out the possibility of using BGO counters for this application.

#### 4. Conclusions

We have started a detailed study to conceive a mobile system to detect small quantities of hidden

explosives using modern technology in order to improve the overall effectiveness from the point of view of efficiency, costs and transportability. To this end we are proceeding to test a number of CsI(Tl) scintillators assembled with a photodiode read-out and dedicated surface mounted fast front-end electronics. We are testing neural-network-based decision algorithms for online analysis of the signals. Finally, we are planning to test a mixed (thermal and fast neutron) technique in order to reduce both the scanning time and the false alarm rates.

#### References

- [1] International Workshop on Localization and Identification of APM, Report EUR 16 329 EN, 1995.
- [2] T. Gozani, Nucl. Instr. and Meth. B 79 (1993) 601.
- [3] J.E. McFee, A. Carruthers, Proc. Conf. on Detection and Remediation Technologies for Mines and Minelike Targets, Orlando, SPIE, vol. 2765, 1996.
- [4] R. Brun, F. Bruyant, M. Maire, A.C. McPherson, P. Zancarini, GEANT3 Users Guide, Data Handling Division, DD/EE/84-1, CERN, 1986.
- [5] H. van der Ploeg et al., Phys. Rev. C 52 (1995) 1915.
- [6] O. Hauser et al., Nucl. Instr. and Meth. 213 (1980) 301.
- [7] W. Krolas et al., Z. Phys. A 344 (1992) 145.